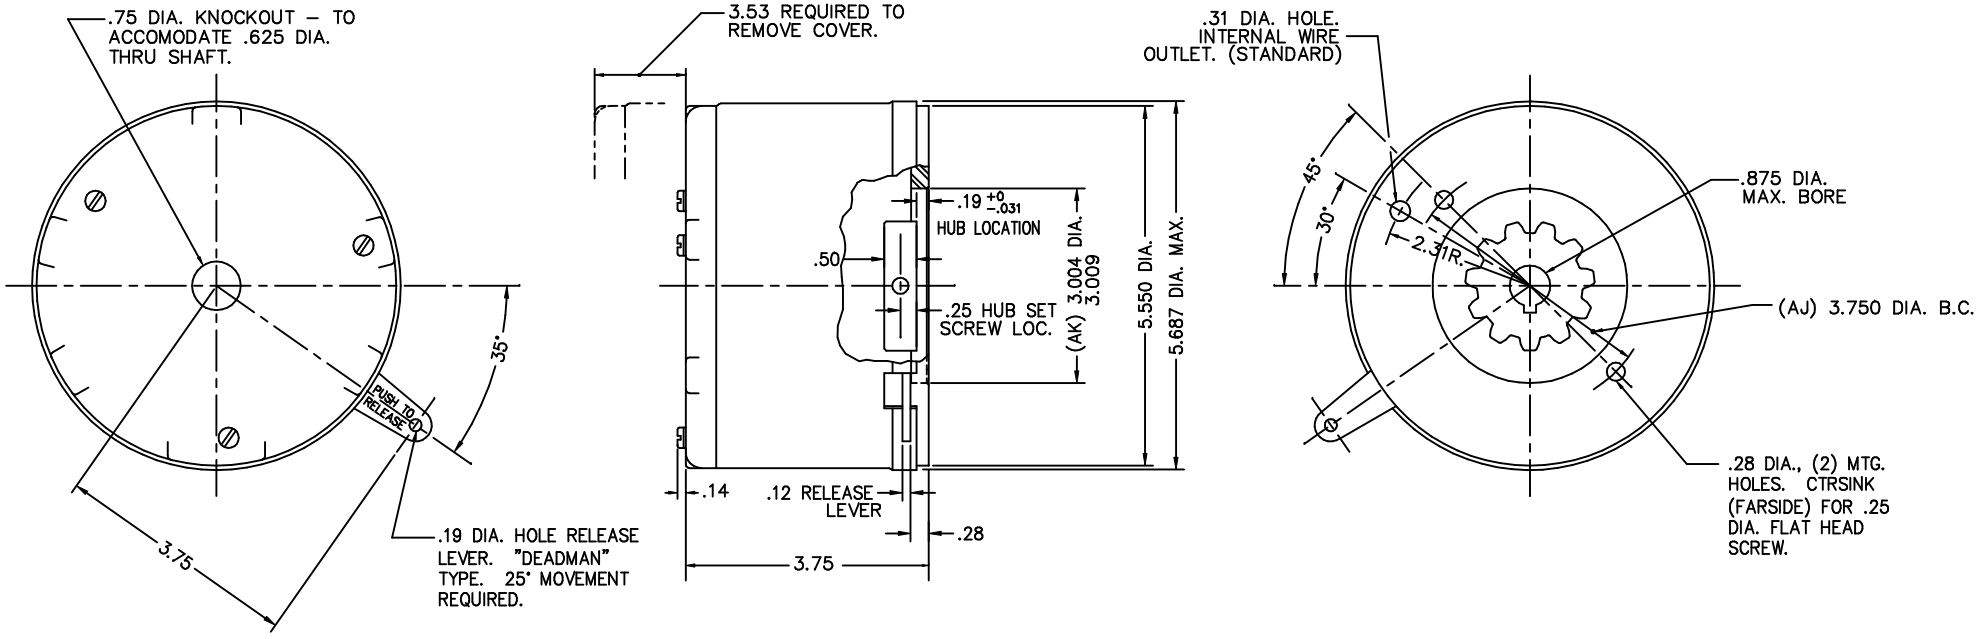

DUAL VOLTAGE WIRING DIAGRAM

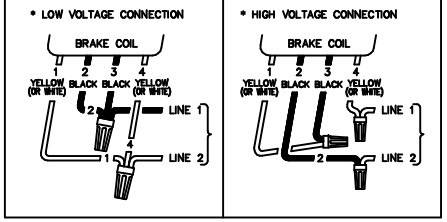

*SEE BULLETIN BK4618 FOR OPERATING, INSTALLATION AND PARTS INSTRUCTIONS

MODEL	MODEL WITH MANUAL RELEASE	TORQUE LB.FT.	No. OF ROTATING FRICTION DISCS	MAX. RPM	THERMAL CAPACITY HPS/MIN.	INERTIA WK^2 LB.FT.^{2}	WT. LBS. PKG'D	MAGNET AIR GAP ±.005 MAX.	MAGNET AIR GAP ±.005 ORIGINAL SETTING	BRACKET MATERIAL	COVER MATERIAL
2–51001–05A	2–51001–050	1.5	1	3600	4	.0023	7	.150	.065	STEEL	STAMPED STEEL
2–51003–05A	2–51003–050	3	1	3600	4	.0023	7			STEEL	STAMPED STEEL
2–51006–05A	2–51006–050	6	1	3600	4	.0023	7			STEEL	STAMPED STEEL

THIS MATERIAL IS PROPERTY OF DINGS COMPANY. NO RIGHTS ARE GRANTED TO USE SUCH MATERIAL FOR ANY PURPOSE OTHER THAN (1) PRODUCT EVALUATION OR MAINTENANCE OR (2) THE FURNISHING OF SERVICES AND SUPPLIES TO THE DINGS COMPANY.

TITLE: BRAKE OUTLINE DRAWING
50 SERIES, NEMA 2 (S5005, S5006)

TOLERANCE UNLESS OTHERWISE NOTED: .000 ± .005, .00 ± .010, FRACTIONS ± .015, ANGLES ± 1°

DWN BY: RM
CHD BY:
DATE: 7-9-98
BRAKE: FULL
REFER TO CAD FILE: L050024

Dings DYNAMICS
4740 WEST ELECTRIC AVE. MILWAUKEE, WISCONSIN 53219 U.S.A.

DRAWING NO. L050024
REV. NO. B

REV	CHG#	DATE	BY	REVISION
B	2250	8-20-08	JEB	UPDATED DRAWING
A	1768	7-17-98	RM	ADDED MAGNET AIR GAP TO TABLE