


BOLT HOLE FLAME PATH SEALED INSIDE BRAKE AFTER MOUNTING WITH (4)-3/4"-16 X 3/4" LG. SOCKET HEAD SET SCREWS (SUPPLIED BY DINGS).

MODEL NUMBER		TORQUE LB.FT.	No. OF ROTATING FRICTION DISCS	MAX. RPM	THERMAL CAPACITY HPS/MIN.	INERTIA WK <sup>2</sup> LB.FT. <sup>2</sup>	WT. LBS. PKG'D.	MAGNET AIR GAP ±.005		DIMENSIONS			
CAST IRON HOUSING (COVER & BRACKET)	ALUMINUM HOUSING (COVER & BRACKET)							MAX.	ORIGINAL SETTING	C	AH		AC
8-61001-66B	8-61001-67B	1.5	1	3600	6	.02	42	.100	.040/.045	7.94	2 3/8	1 3/4	2.06
8-61003-66B	8-61003-67B	3	1	3600	6	.02	42	.100	.040/.045	7.94	2 3/8	1 3/4	2.06
8-62006-66B	8-62006-67B	6	2	3600	6	.03	44	.100	.040/.045	8.31	2 3/4	2	2.44
8-63009-66B	8-63009-67B	9	3	3600	6	.04	47	.100	.050/.055	8.69	3 1/8	2 1/4	2.81
8-63010-66B	8-63010-67B	10	3	3600	6	.04	47	.100	.050/.055	8.69	3 1/8	2 1/4	2.81
8-63015-66B	8-63015-67B	15	3	3600	6	.04	47	.100	.050/.055	8.69	3 1/8	2 1/4	2.81

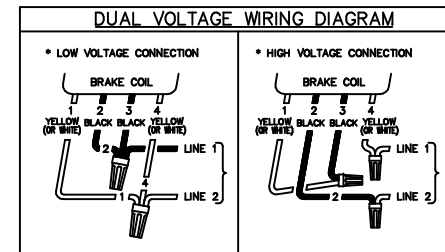

\*SEE BULLETIN BK4614 FOR OPERATING, INSTALLATION AND PARTS INSTRUCTIONS

THIS MATERIAL IS PROPERTY OF DINGS COMPANY. NO RIGHTS ARE GRANTED TO USE SUCH MATERIAL FOR ANY PURPOSE OTHER THAN (1) PRODUCT EVALUATION OR MAINTENANCE OR (2) THE FURNISHING OF SERVICES AND SUPPLIES TO THE DINGS COMPANY.

OUTLINE DRAWING, 60 SERIES  
HAZARDOUS LOCATION, ALL MODELS

TOLERANCE UNLESS OTHERWISE NOTED

FINISHES: F = FULL, S = SPOT, D = DIMENSIONAL

DESIGNED BY: JDM

DRAWN BY: JDM

DATE: 06/02/03

SCALE: FULL

FILE: L060369

**DINGS DYNAMICS**  
MAGNETIC BRAKE DIV. U.S.A.

REV. 114

REV. 114

REV. 114

A 2228 6/12/00 JEM UPDATED OUTLINE  
REV CHG# DATE BY REVISION

REV. 114

REV. 114