

\*\*LOCATING DIMENSION FOR MOUNTING HUB TO MOTOR SHAFT—SEE INSTALLATION INSTRUCTIONS.


\*\*\*\*INCLUDED IN PARTS PACKAGE

MODEL NUMBER	NUMBER OF ROTATING DISCS	TORQUE LB.FT.	THERMAL CAPACITY HPS/MIN.	INERTIA OF ROTATING PARTS LB.FT. <sup>2</sup>	MAGNET AIR GAP		DIMENSIONS				ENCLOSURE MATERIAL
					ORIGINAL SETTING	MAXIMUM	C*	AC*	X ONE PIECE SHAFT	**X TWO PIECE SHAFT	
6-61001-5155	1	1.5	6	.006	.045/.050	.100	4.94	.59	.81	.88	ALUMINUM
6-61003-5155	1	3	6	.006	.045/.050	.100	4.94	.59	.81	.88	ALUMINUM
6-62006-5155	2	6	6	.010	.050/.055	.100	4.94	.59	.81	.88	ALUMINUM
6-62010-5155	2	10	6	.010	.050/.055	.100	4.94	.59	.81	—	ALUMINUM
6-63015-5155	3	15	6	.014	.060/.065	.100	5.31	.87	1.19	—	ALUMINUM
6-63020-5155	3	20	6	.014	.060/.065	.100	5.31	.87	1.19	—	ALUMINUM

\* NOTE: WHEN APPLICABLE, TABLE DIMENSIONS ARE REFERENCED FROM THE BRAKE MOUNTING FACES AND DO NOT INCLUDE THE GASKET THICKNESSES.

\*\*\* 2-PIECE SHAFT DESIGNS ARE USED FOR TORQUES UP TO AND INCLUDING 6 LB.FT. ONLY.

— EXTERNAL ENCLOSURE SURFACES PAINTED WITH BISSC APPROVED WHITE EPOXY PAINT. WINDOW CAPS AND HARDWARE MADE OF STAINLESS STEEL.

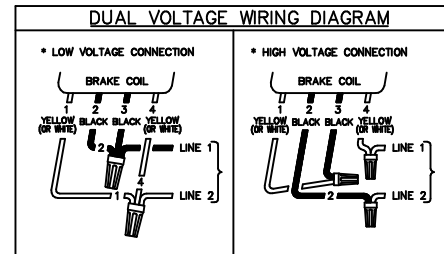

\*SEE BULLETIN BK4646 FOR OPERATING, INSTALLATION AND PARTS INSTRUCTIONS

OUTLINE DRAWING, DOUBLE C FACE NEMA 4X ENCLOSURES (S65155)		 DYNAMICS MANUFACTURING DIV.	DATE: 11-4-05 SIZE: FULL DRAWING NO.: L060397	REV. NO.: CAD FILE: L060397
TOLERANCE UNLESS OTHERWISE NOTED: DIM. ± .005 HOLE ± .005 FIN. ± .005	DESIGNED BY: CHECKED BY: DATE: 11-4-05 SIZE: FULL			